
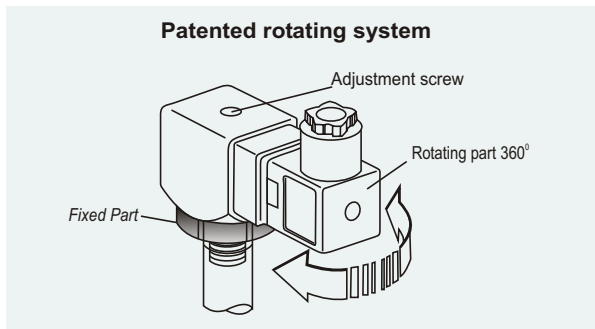



PRESSURE SWITCH

MOD. 24

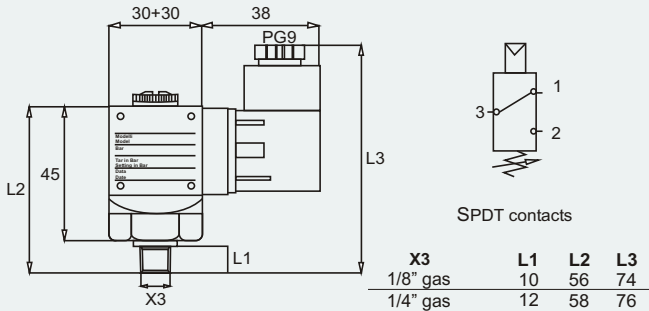

- **Case** : Anodized Aluminium
- **Threaded Fitting** : Passivated AVP Steel
- **Max switches current** : 5A, 250 VAC
- **Max fluid temperature** : 120°C
- **Mechanical working life** : 10⁶ Operations
- **Action type** : 1B
- **Protection Degree** : IP65
- **Hysteresis** : 15 to 30% of setting value
- **Weight** : 180 gms

Ordering codes

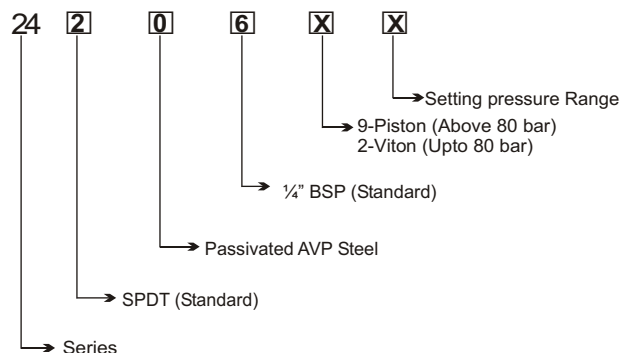

PART NUMBER

		Setting range (in bar)	Hysteresis (in bar)	Max Static pressure (in bar)
diaphragm	24 2 0 6 2 1	0.2 to 5	± 0.1	100
	24 2 0 6 2 2	1 to 10	± 0.3	
	24 2 0 6 2 3	10 to 25	± 0.5	150
	24 2 0 6 2 4	25 to 80	± 2	
piston	24 2 0 6 9 5	30 to 150	± 7	500
	24 2 0 6 9 6	100 to 300	± 10	



HTA INSTRUMENTATION PVT LTD.

NO.73, Ramachandra Agrahara, Near T. R. Mills, Chamarajpet, Bangalore-560 018, India

TEL: 080-26749750, 26759253 FAX: 080-26740681, E-mail: hitechas@eth.net, Web: www.htaipl.com

