


# PRESSURE SWITCH


# MOD. XP110

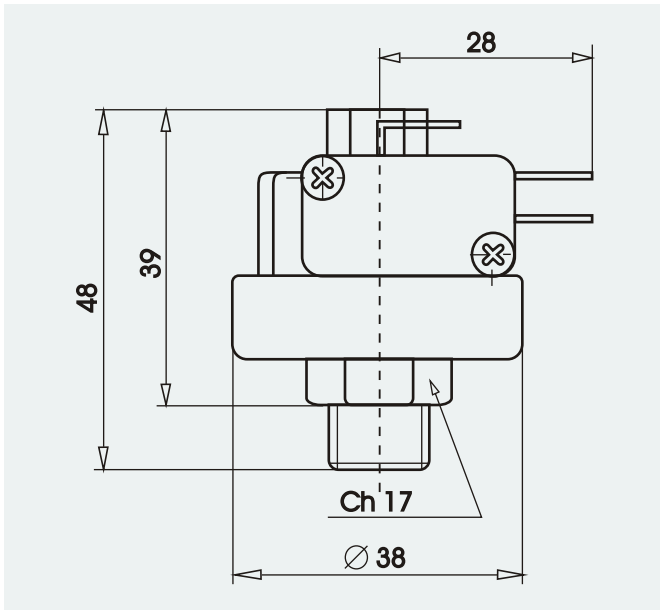

## Specification

- Pressure Connection - brass
- Thread - 1/4" BSP
- Main Body - Techno Polymer
- Membrane and Sealing - AISI 316 and silicon
- Protection Degree - IP00
- Adjustment - by screw
- Electric Intervention - SPDT 16(A) -250VAC
- Electric Connection - Terminal 6.3 × 0.8
- Admitted Temperature - 125°C
- Burst Pressure - higher than 20 bar
- Thermic Drift - 0.04 bar for 10°C with respect to temperature of + 20°C

### Connections and electric plants

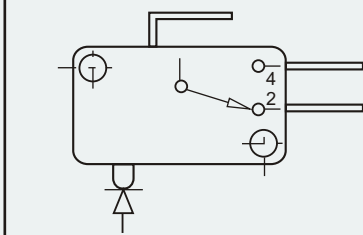

Model Type	Setting Interval	Test Pressure	Fix Differential
<b>XP110</b>	0.2 to 1.2 Bar	4 Bar	0.2 + / - 0.1 bar
	0.5 to 1.5 Bar	5 Bar	0.2 + / - 0.1 bar
	2 to 6 Bar	8 Bar	0.25 + / - 0.15 bar
	4 to 9 Bar	12 Bar	0.3 + / - 0.15 bar

Homologations : EN60730-1 and EN60730-2-6



## HTA Instrumentation Pvt Ltd.

NO.73, Ramachandra Agrahara, Near T. R. Mills, Chamarajpet, Bangalore560018, India  
 TEL: 080-26749750, 26759253 FAX: 080-26740681, E-mail: hitechas@eth.net, Web: www.htaipl.com

